



LIANSHENG DATA BOOKLET



莲盛

上海莲盛泵业制造有限公司
SHANGHAI LIANSHENG PUMP-MAKING CO.,LTD

电话 Phone: 021-5927 0745

传真 FAX: 021-5927 1080

网址 Web: WWW.LIANSHENGPUMP.COM

地址 ADD: 上海市青浦区练西公路2646号

No. 2646, Lianxi Road, Qingpu District, Shanghai



高效低噪音不锈钢多级离心泵

High efficiency and low noise stainless
steel multistage centrifugal pump

企业简介Company Profile

上海莲盛泵业制造有限公司上海莲盛水泵厂创建于六十年代，是国内著名的大型给排水设备生产制造企业。上海莲盛泵业拥有专业的研制开发、生产销售、测试鉴定团队，优质的服务，先进的技术发展理念；提供泵、阀和流体输送系统、电气控制系统设备和解决方案，产品广泛适用于城市、矿山、化工、锅炉、空调、消防等行业给排水以及适用宾馆、酒店、大厦、旅游、娱乐场所、军事等工程领域的应用。不断前进中的莲盛泵业正与同行与时俱进，销售市场网络遍及全国各地。

竞争中的莲盛泵业，技术力量雄厚、拥有一支高素质的管理层和员工队伍及配套齐全的现代化生产、管理控制设备，并拥有高科技的集信息、科研、设计、试制、鉴定于一体的水泵研究所，可随时根据市场(顾客)动态，不断研发新产品，满足市场(顾客)的不断变化需求。

发展中的莲盛泵业是最早得到ISO9001:2008国内、国际质量体系认证，并以中国泵业协会、上海市商标协会、上海市先进企业、中国名牌产品为企业形象维护准则，制造出了一个又一个的优秀产品成果。产品在上海市第三、第四、第五、第六届技术交流会上获“节能产品奖”，全国星火杯成果适用技术展览会上获“银奖”、上海市科学成果“三等奖”，全国创造发明竞赛“优秀产品奖”，上海市第五届科学技术博览会上莲盛牌系列产品获“金奖”，并在2003年成为首届国家级“重合同、守信用”企业，获得了中国政府的LC(信用证)。“莲盛”牌商标连续两届被上海市认定为“上海市著名商标”的称号。

奋进中的莲盛泵业以“实实在在的产品、实实在在的质量、实实在在的服务、实实在在的诚信”为宗旨、不断推出“莲盛”牌卓越产品面向市场，共创未来共同发展的市场和辉煌。

Shanghai Liansheng Pump Making Co., Ltd. (Shanghai Liansheng Pump Factory), established in the sixties, is well-known large-scale domestic water supply and drainage equipment manufacturing enterprise. Shanghai Liansheng Pump Industry has professional research and development, production and sales, test and identification team, high-quality service, advanced technology development concept; provide pumps, valves and fluid delivery systems, electrical control system equipment and solutions. Its products are widely used in cities, mines, chemical, industry, boilers, air conditioning and other fields for water supply and drainage as well as in guesthouses, buildings, tourism, entertainment places, and other engineering fields. The everongoing company is advancing with the times together with its peers. Its sales network covers the whole country. The company has a strong technical force in competition, high quality management and ordinary employees, complete modern production, management and control equipment and a high-tech water pump research institute integrating information, research, design, trial production and identification, which enables it to keep developing new products according to the market(customer)trends to meet their ever-changing market (customer)needs.

As one of the enterprises passing the domestic and international ISO9001: 2008 quality system certifications, this growing company maintains its image in line with the requirements of the China General Machinery Industry Association pump Association, Shanghai Trademark Association, Advanced Enterprise of Shanghai and China Top-Brand Products, and has produced many excellent products. Some of its products were granted the “Energy-saving Product Award” of the third, fourth fifth and sixth technical exchanges of Shanghai, the Silver Award of the National Spark Cup Achievement Application Technology Exhibition, the third prize of the Scientific Achievement Award of Shanghai, and the “Excellent Product Award” on the National Invention Contest. Several products from Liansheng Brand were granted the golden prize on the Fifth Science and Technology Exhibition of Shanghai. In 2003, the company was selected as a First National “trustworthy” Enterprise and obtained the LC(letter of credit) of the Chinese government. The Liangsheng trademark was, for two consecutive times, granted the title of “Famous Trademark of Shanghai” by Shanghai Adhering to the tenet of “Concrete Products, Quality, Services and Good Faith”, the enterprising company always launches excellent products of the Liansheng brand to the market, creating common development based market and splendor in the future.

目录 *Contents*



总体数据 General data

产品优点 Product Benefit. 1-2

产品特点 Product Characteristics. 2

适用范围 Scope of application. 3

型号意义 Model meaning. 3

技术数据 Technical data

LQDM,LQDMF4. 4

LQDM,LQDMF5. 5

LQDM,LQDMF8. 6

LQDM,LQDMF10. 7

LQDM,LQDMF12. 8

LQDM,LQDMF15. 9

LQDM,LQDMF16. 10

LQDM,LQDMF20. 11

LQDM,LQDMF32. 12

LQDM,LQDMF45. 13

LQDM,LQDMF64. 14

LQDM,LQDMF90. 15



莲盛

莲盛泵业

LIANSHENG PUMP



莲盛


产品优点 Product benefit

1.效率高，功率因数高，宽经济运行范围。

独特的定转子设计，拓宽了高效区域、有效降低损耗[温升低]，符合IE4能效标准,异步电机在35%额定负载附近效率迅速下降，25%额定负载时功率因数从额定负载时的0.85左右迅速下降到0.5以下；GP永磁同步可以在25%--120%功率范围内保持高效率和高功率因数运行，25%额定负载时功率因数仍可达到0.9以上。

1.High efficiency, high power factor and wide economic operation range..

Unique design for stator and rotor , broadening the efficient area、consumption can be effectively lowered [Low Temperature Rise] , IE4 efficiency。Asynchronous motor efficiency drops rapidly near 35% rated load , when rated load is 25% ,the power factor descends rapidly from 0.85 to 0.5 ; GP permanent magnet synchronization can maintain high efficiency and high power factor operation in 25%--120% power range , 25% rated load,the power factor can still reach over 0.9.

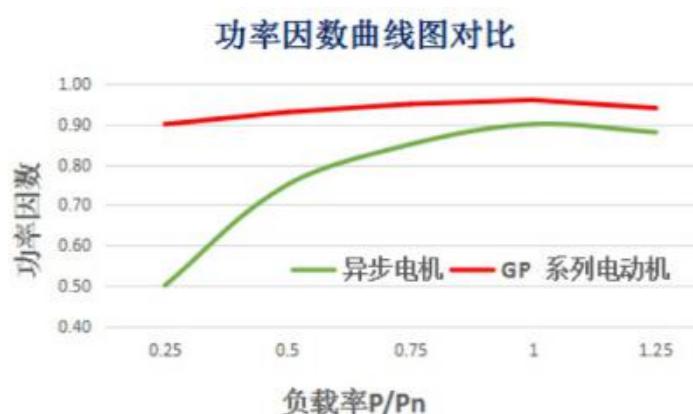


2.启动转矩大，启动电流小。

异步电机启动过程中，启动转矩小，启动电流却很大，对电网冲击较大，在频繁起停的场合还有绕组过热的风险,永磁同步变频调速电机的主磁场恒定，定子电流几乎全部为有功电流，启动电流小、启动转矩大。

2. The starting torque is large and the starting current is small.。

In the start-up process of asynchronous motor, the starting torque is small, the starting current is very large, the impact on the grid is large, in frequent starting and stopping occasions there also have risk of winding overheating. The main magnetic field of permanent magnet synchronous variable frequency speed motor is constant, the stator current is almost all active current, the starting current is small and the starting torque is large.

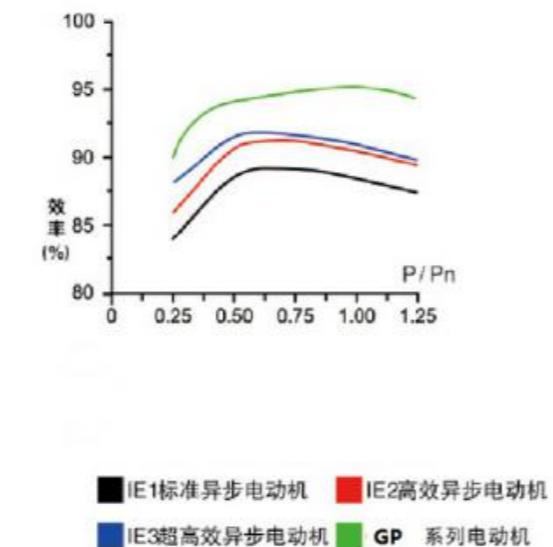

3.过温保护功能。

内置过温保护传感器，当电机温度过高时，配合变频器实现自动保护。

3. Over temperature protection function

Built in over temperature protection sensor, when the motor temperature is too high, automatic protection with inverter .

4.散热能力强。


机壳材料选用优质铝材，采用先进的铝锭挤压拉伸和时效处理，散热能力和结构强度更好。

4 .Strong heat dissipation capability.

The shell material is made of high quality aluminium and use advanced aluminum ingot extrusion and aging treatment, the heat dissipation ability and structure strength all better.

产品特点 Product characteristics

- 低噪音
Noiseless
- 绝缘等级F级；也可依客户需求特制
Insulation class F ; Customization available.
- 可承受200%额定转矩过载（额定电压和功率下）
Torque overload capacity 200% (Rated).
- 低速运行转矩平滑；无震动
High performance at low speed ; No crawl or vibration.
- 效率高：可达一级能效 (IE4)
Efficiency: up to level I Energy efficiency (IE4)

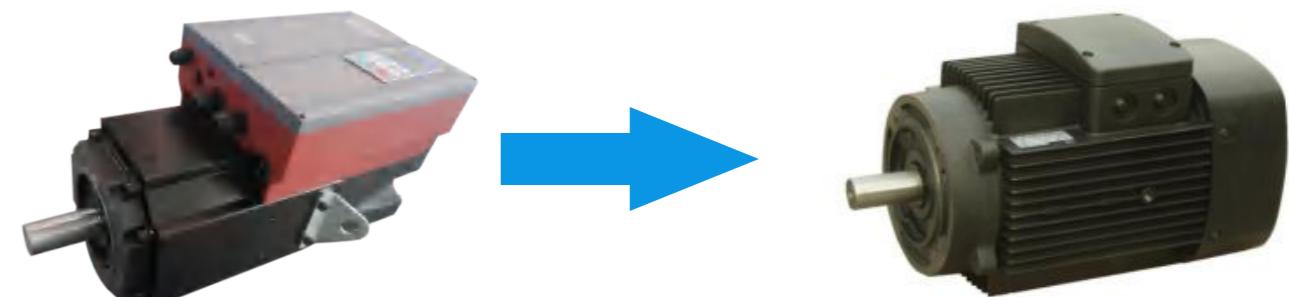

与传统异步电动机相比，永磁电动机的效率提高了10%以上。
Compared with traditional asynchronous motor, the efficiency of permanent magnet motor is improved by more than 10%.



莲盛

莲盛泵业

LIANSHENG PUMP



莲盛

适用范围 Scope of application

LQDM/LQDMF是一种多功能产品，可以输送从自来水到工业液体的各种不同介质，适用于不同温度、流量和压力范围，LQDM适用于无腐蚀液体，LQDMF适用于轻度腐蚀性液体。


- 供水：水厂过滤与输送，水厂分区送水、主管增压、高层建筑增压。
- 工业增压：流程水系统、清洗系统、高压冲洗系统、消防系统。
- 工业液体输送：冷却和空调系统、锅炉给水和冷凝系统、机床配套、酸和碱。
- 水处理：超滤系统、反渗透系统、蒸馏系统、分离器、游泳池。
- 灌溉：农田灌溉、喷灌、滴灌。

LQDM/LQDMF is a multi-functional product that can transport a variety of media from tap water to industrial liquids, suitable for different temperatures, flow rates and pressure ranges, LQDM for non-corrosive liquids, and LQDMF for slightly corrosive liquids.

- Water supply: water plant filtration and transportation, water plant sub-district water supply, supercharging, high-rise building pressurization.
- Industrial pressurization: process water system, cleaning system, high pressure flushing system, fire protection system.
- Industrial liquid delivery: cooling and air conditioning systems, boiler feed and condensing systems, machine tool sets, acid and alkali.
- Water treatment: ultrafiltration system, reverse osmosis system, distillation system, separator, swimming pool.
- Irrigation: farmland irrigation, sprinkler irrigation, drip irrigation.

型号意义 Model meaning

LQDM(F) 32-8-2



小叶轮数 Small impeller number

极数 Stage number

额定流量 Rated flow rate(m³/h)

高效低噪音不锈钢轻型立式多级离心泵 (过流部件为不锈钢304或316L)

High efficiency and low noise stainless steel light vertical multistage centrifugal pump (overflow parts are stainless steel 304 or 316L)

技术数据 Technical date


性能表 (Performance table)

型号 Model	功率 Power kW	转速 Speed r/min	Q (m³/h)	1.5	2	3	4	5	6	7	8
LQDM4-14	3	3000	H	148	138	133	122	110	97	74	52
				166	157	153	141	126	110	85	60
				200	187	183	167	150	133	102	62
				230	218	210	194	175	151	118	86

尺寸和重量 (Dimensions and weight)

型号 Model	Size (mm)					Weight (KG)
	B1	B2	B1+B2	D1	D2	
LQDM4-14	643	440	1083	210	192	33
LQDM4-16	697	440	1137	210	192	38
LQDM4-19	778	440	1218	210	192	40
LQDM4-22	859	440	1299	210	192	45

安装图 (Installation drawing)

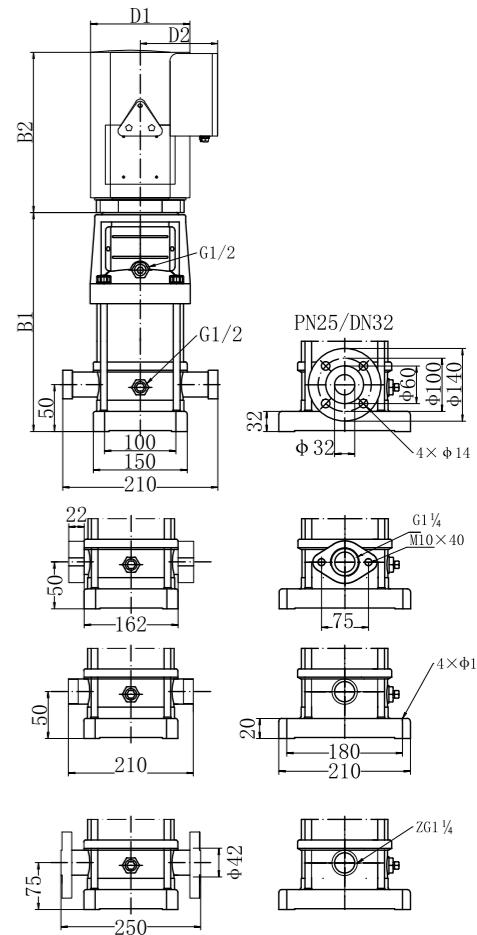



莲盛

莲盛泵业

LIANSHENG PUMP



莲盛

技术数据 Technical data

性能表 (Performance table)


型号 Model	功率 Power	转速 Speed	Q (m³/h)								
				2	3	4	5	6	7	8	
LQDM5-18	3	3000	H	126	121	115	108	96	83	68	
LQDM5-20	3	3000		140	134	128	120	106	93	75	
LQDM5-22	4	3000		155	148	141	133	118	103	84	
LQDM5-24	4	3000		169	163	154	145	129	112	92	
LQDM5-26	4	3000		183	176	167	157	139	121	99	
LQDM5-29	4	3000		204	196	186	175	155	135	110	
LQDM5-32	5.5	3000		230	222	210	196	175	153	124	
LQDM5-36	5.5	3000		259	249	236	222	196	171	140	

技术数据 Technical data

性能表 (Performance table)

型号 Model	功率 Power	转速 Speed	Q (m³/h)								
				5	6	7	8	9	10	11	12
LQDM8-8	3	3000	H	91	87	84	80	75	71	63	57
LQDM8-10	4	3000		114	109	106	100	95	88	80	71
LQDM8-12	4	3000		135	131	127	121	114	100	95	85
LQDM8-14	5.5	3000		158	154	148	142	133	123	111	100
LQDM8-16	5.5	3000		181	176	170	162	152	142	129	116
LQDM8-18	7.5	3000		204	199	191	182	171	159	146	131
LQDM8-20	7.5	3000		227	220	213	203	191	178	164	147

安装图 (Installation drawing)

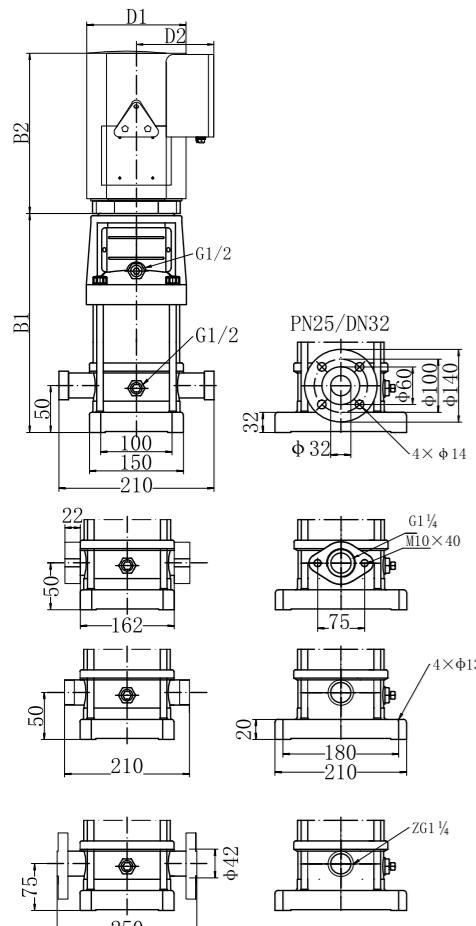



莲盛

莲盛泵业

LIANSHENGPUMP




莲盛

技术数据 Technical date

性能表 (Performance table)

型号 Model	功率 Power	转速 Speed	Q (m³/h)	6	7	8	9	10	11	12	13
	kW	r/min									
LQDM10-7	3	3000	H	75	72	69	65	61	56	50	45
LQDM10-8	3	3000		86	83	80	75	70	63	57	50
LQDM10-9	3	3000		96	93	90	84	76	72	64	57
LQDM10-10	4	3000		109	105	100	95	87	81	72	64
LQDM10-12	4	3000		131	126	120	114	104	97	87	76
LQDM10-14	5.5	3000		154	148	142	134	123	115	103	91
LQDM10-16	5.5	3000		177	174	163	154	140	131	118	104
LQDM10-18	7.5	3000		199	191	183	174	160	147	132	117
LQDM10-20	7.5	3000		220	213	203	192	179	164	147	130
LQDM10-22	7.5	3000		242	234	224	212	194	180	162	143

安装图 (Installation drawing)

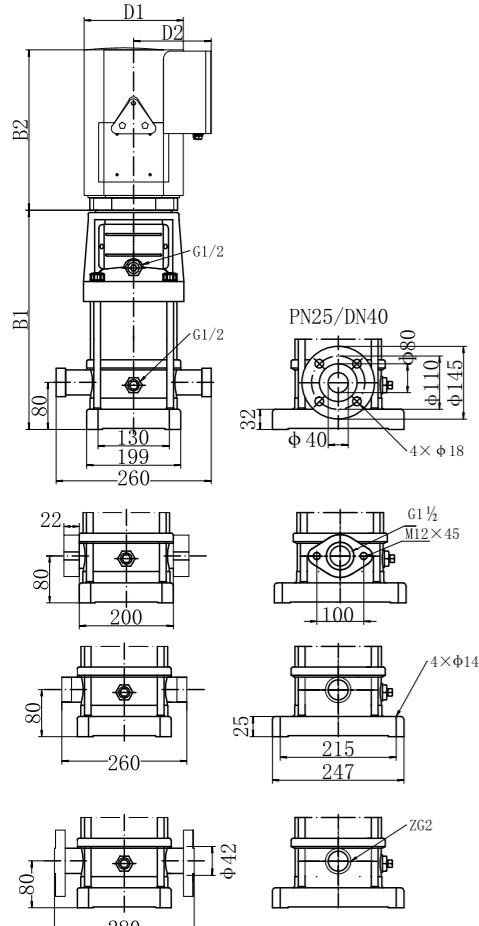

尺寸和重量 (Dimensions and weight)

型号 Model	Size (mm)					Weight (KG)
	B1	B2	B1+B2	D1	D2	
LQDM10-7	539	440	979	210	192	51
LQDM10-8	569	440	1009	210	192	52
LQDM10-9	599	440	1039	210	192	53
LQDM10-10	629	440	1069	210	192	62
LQDM10-12	689	440	1129	210	192	64
LQDM10-14	769	470	1239	210	192	73
LQDM10-16	829	470	1299	210	192	75
LQDM10-18	889	470	1359	210	192	79
LQDM10-20	849	470	1319	210	192	81
LQDM10-22	1009	470	1479	210	192	84

技术数据 Technical date


性能表 (Performance table)

型号 Model	功率 Power	转速 Speed	Q (m³/h)	9	10	11	12	13	14	15	16
	kW	r/min									
LQDM12-5	3	3000	H	65	60	57	55	51	47	43	38
LQDM12-6	4	3000		78	72	69	65	61	57	51	46
LQDM12-7	4	3000		91	84	80	76	71	67	60	53
LQDM12-8	5.5	3000		104	96	92	87	82	76	69	61
LQDM12-9	5.5	3000		118	109	104	99	93	86	78	70
LQDM12-10	5.5	3000		131	121	116	110	103	96	87	79
LQDM12-12	7.5	3000		157	145	139	132	124	116	105	94
LQDM12-14	7.5	3000		183	169	162	154	145	135	122	109
LQDM12-16	11	3000		210	194	186	177	166	155	140	126
LQDM12-18	11	3000		237	220	210	200	187	175	158	142

尺寸和重量 (Dimensions and weight)

型号 Model	Size (mm)					Weight (KG)
	B1	B2	B1+B2	D1	D2	
LQDM12-5	479	440	919	210	192	45
LQDM12-6	509	440	949	210	192	52
LQDM12-7	559	440	999	210	192	57
LQDM12-8	589	470	1059	210	192	57
LQDM12-9	619	470	1089	210	192	59
LQDM12-10	649	470	1119	210	192	58
LQDM12-12	709	470	1179	210	192	60
LQDM12-14	589	470	1059	210	192	114
LQDM12-16	919	535	1454	250	259	114
LQDM12-18	979	535	1514	250	259	116

安装图 (Installation drawing)

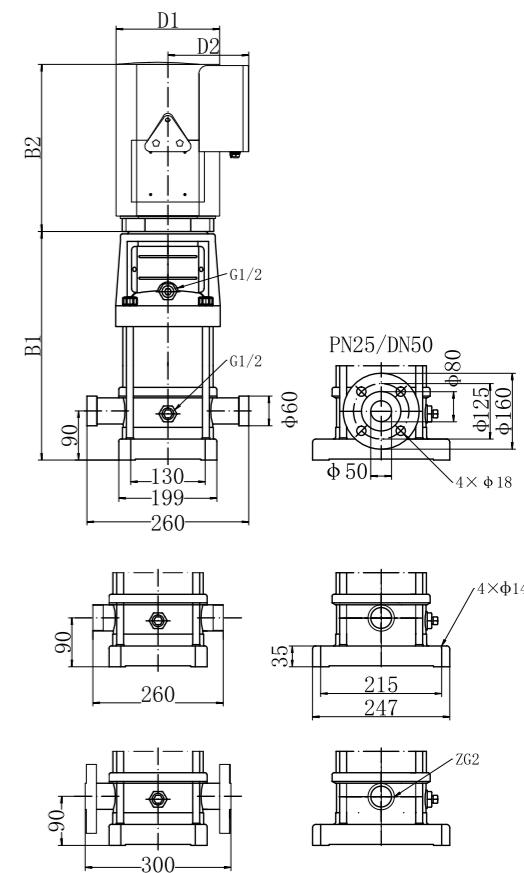



莲盛

莲盛泵业

LIANSHENGPUMP






莲盛

技术数据 Technical data

性能表 (Performance table)

型号 Model	功率 Power	转速 Speed	Q (m³/h)	3	6	9	12	15	18	21
	kW	r/min								
LQDM15-4	3	3000	H	63	60	60	56	51	47	41
LQDM15-5	4	3000		76	74	72	70	63	58	52
LQDM15-6	5.5	3000		91	90	87	84	78	70	63
LQDM15-7	5.5	3000		107	105	103	97	91	82	71
LQDM15-8	7.5	3000		122	120	118	112	105	94	82
LQDM15-9	7.5	3000		136	134	131	126	118	106	92
LQDM15-10	7.5	3000		153	151	148	141	131	119	104
LQDM15-12	11	3000		183	180	177	169	155	142	124
LQDM15-14	11	3000		212	210	205	196	181	165	142
LQDM15-17	15	3000		259	255	251	239	224	202	175

安装图 (Installation drawing)

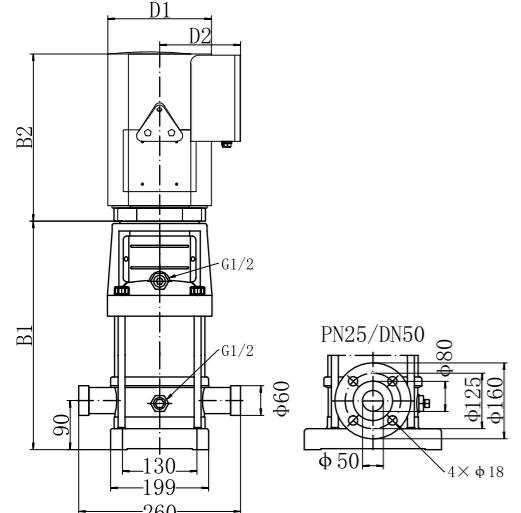



尺寸和重量 (Dimensions and weight)

型号 Model	Size (mm)					Weight (KG)
	B1	B2	B1+B2	D1	D2	
LQDM15-4	508	440	948	210	192	62
LQDM15-5	553	440	993	210	192	63
LQDM15-6	630	470	1100	210	192	72
LQDM15-7	675	470	1145	210	192	74
LQDM15-8	720	470	1190	210	192	77
LQDM15-9	765	470	1235	210	192	78
LQDM15-10	887	470	1357	210	192	104
LQDM15-12	977	535	1512	250	259	108
LQDM15-14	1067	535	1602	250	259	111
LQDM15-17	1202	565	1767	250	259	119

尺寸和重量 (Dimensions and weight)

型号 Model	Size (mm)					Weight (KG)
	B1	B2	B1+B2	D1	D2	
LQDM16-4	508	440	948	210	192	62
LQDM16-5	553	440	993	210	192	63
LQDM16-6	630	470	1100	210	192	72
LQDM16-7	675	470	1145	210	192	74
LQDM16-8	720	470	1190	210	192	77
LQDM16-10	765	470	1235	210	192	78
LQDM16-12	887	470	1357	210	192	104
LQDM16-14	977	535	1512	250	259	108
LQDM16-15	1067	535	1602	250	259	111

安装图 (Installation drawing)

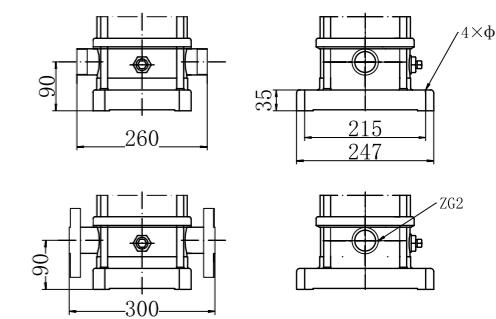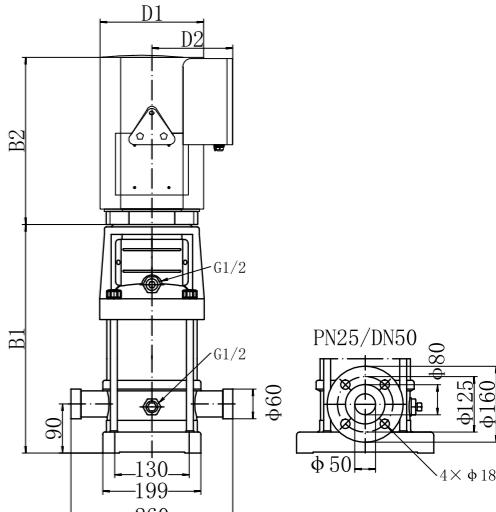



莲盛

莲盛泵业

LIANSHENGPUMP




莲盛

技术数据 Technical data

性能表 (Performance table)

型号 Model	功率 Power	转速 Speed	Q (m³/h)	14	16	18	20	22	24	26	28
	kW	r/min									
LQDM20-3	4	3000	H	43	41	40	38	36	33	29	26
LQDM20-4	5.5	3000		57	56	53	51	48	45	40	36
LQDM20-5	5.5	3000		70	68	65	63	60	55	49	44
LQDM20-6	7.5	3000		84	82	80	76	72	67	60	53
LQDM20-7	7.5	3000		99	97	94	90	84	78	71	63
LQDM20-8	11	3000		115	111	108	103	97	90	82	73
LQDM20-10	11	3000		143	140	135	129	121	112	104	93
LQDM20-12	15	3000		172	168	163	155	145	135	124	111
LQDM20-14	15	3000		202	196	190	181	170	158	145	130
LQDM20-17	18.5	3000		246	239	231	220	207	193	177	158

安装图 (Installation drawing)

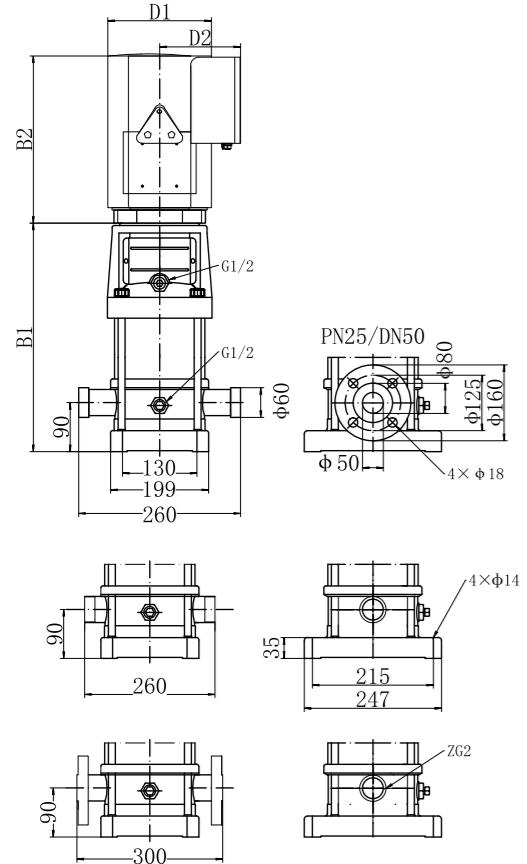

尺寸和重量 (Dimensions and weight)

型号 Model	Size (mm)					Weight (KG)
	B1	B2	B1+B2	D1	D2	
LQDM20-3	427	440	867	210	192	52
LQDM20-4	517	470	987	210	192	54
LQDM20-5	562	470	1032	210	192	56
LQDM20-6	627	470	1097	210	192	63
LQDM20-7	672	470	1142	210	192	65
LQDM20-8	717	535	1252	250	259	104
LQDM20-10	897	535	1432	250	259	109
LQDM20-12	987	565	1552	250	259	122
LQDM20-14	1077	565	1642	250	259	127
LQDM20-17	1212	595	1807	250	259	157


技术数据 Technical data

性能表 (Performance table)

型号 Model	功率 Power	转速 Speed	Q (m³/h)	16	20	24	28	32	36	40
	kW	r/min								
LQDM32-2-2	3	3000	H	32	31	28	25	22	17	12
LQDM32-2	4	3000		39	37	35	32	29	25	20
LQDM32-3-2	4	3000		51	48	45	41	36	31	23
LQDM32-3	5.5	3000		59	56	52	48	44	38	29
LQDM32-4-2	7.5	3000		71	68	63	58	50	44	33
LQDM32-4	7.5	3000		79	75	71	64	58	51	40
LQDM32-5-2	7.5	3000		91	86	81	74	65	57	45
LQDM32-5	11	3000		98	94	88	81	73	64	51
LQDM32-6-2	11	3000		110	106	98	91	81	71	56
LQDM32-6	11	3000		118	114	106	98	88	79	62
LQDM32-7-2	11	3000		130	124	117	107	96	85	65
LQDM32-7	15	3000		138	132	123	115	104	93	73
LQDM32-8-2	15	3000		148	143	134	124	111	98	78
LQDM32-8	15	3000		157	151	142	131	119	106	84
LQDM32-9-2	15	3000		168	162	153	141	128	111	90
LQDM32-9	15	3000		177	170	160	148	135	119	96
LQDM32-10-2	18.5	3000		191	181	171	159	143	126	99
LQDM32-10	18.5	3000		199	189	179	166	151	133	107
LQDM32-11-2	18.5	3000		211	201	189	179	159	140	111

尺寸和重量(Dimensions and weight)

型号 Model	Size (mm)					Weight (KG)
	B1	B2	B1+B2	D1	D2	
LQDM32-2-2	583	440	1023	210	192	74
LQDM32-2	583	440	1023	210	192	77
LQDM32-3-2	653	440	1093	210	192	73
LQDM32-3	653	470	1123	210	192	73
LQDM32-4-2	723	470	1193	210	192	81
LQDM32-4	723	470	1193	210	192	81
LQDM32-5-2	893	470	1363	210	192	140
LQDM32-5	893	535	1428	250	259	140
LQDM32-6-2	963	535	1498	250	259	138
LQDM32-6	963	535	1498	250	259	138
LQDM32-7-2	1033	535	1568	250	259	148
LQDM32-7	1033	565	1598	250	259	148
LQDM32-8-2	1103	565	1668	250	259	152
LQDM32-8	1103	565	1668	250	259	152
LQDM32-9-2	1173	565	1738	250	259	186
LQDM32-9	1173	565	1738	250	259	186
LQDM32-10-2	1243	595	1838	250	259	189
LQDM32-10	1243	595	1838	250	259	189
LQDM32-11-2	1313	595	1908	250	259	210

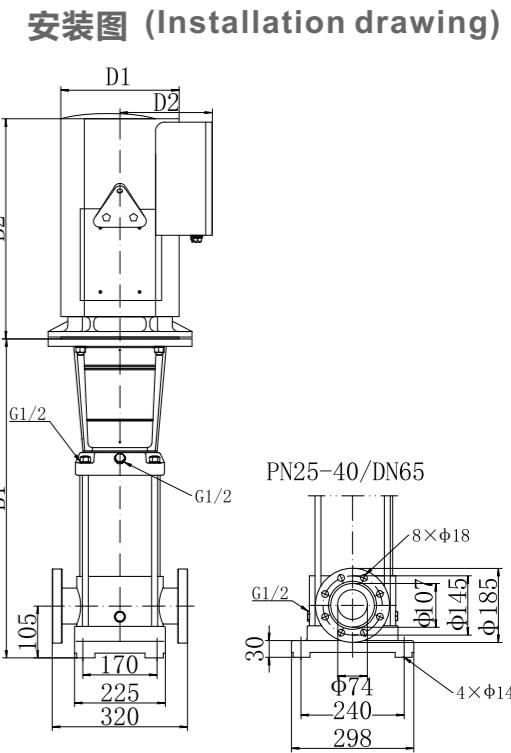



莲盛

莲盛泵业

LIANSHENGPUMP




莲盛

技术数据 Technical data

性能表 (Performance table)

型号 Model	功率 Power	转速 Speed	Q (m³/h)	25	30	35	40	42	45	50	55
	kW	r/min									
LQDM45-1-1	3	3000	H	22	21	20	19	17	16	14	12
LQDM45-1	4	3000		26	25	24	23	22	21	20	17
LQDM45-2-2	5.5	3000		44	41	39	36	35	33	29	25
LQDM45-2	7.5	3000		52	50	48	46	45	43	38	34
LQDM45-3-2	11	3000		69	67	63	59	57	55	48	41
LQDM45-3	11	3000		78	75	72	69	67	63	58	51
LQDM45-4-2	15	3000		95	92	87	82	80	75	68	59
LQDM45-4	15	3000		104	100	96	92	88	85	78	68
LQDM45-5-2	15	3000		121	117	111	105	102	96	87	75
LQDM45-5	18.5	3000		130	126	120	115	110	106	96	85

安装图 (Installation drawing)

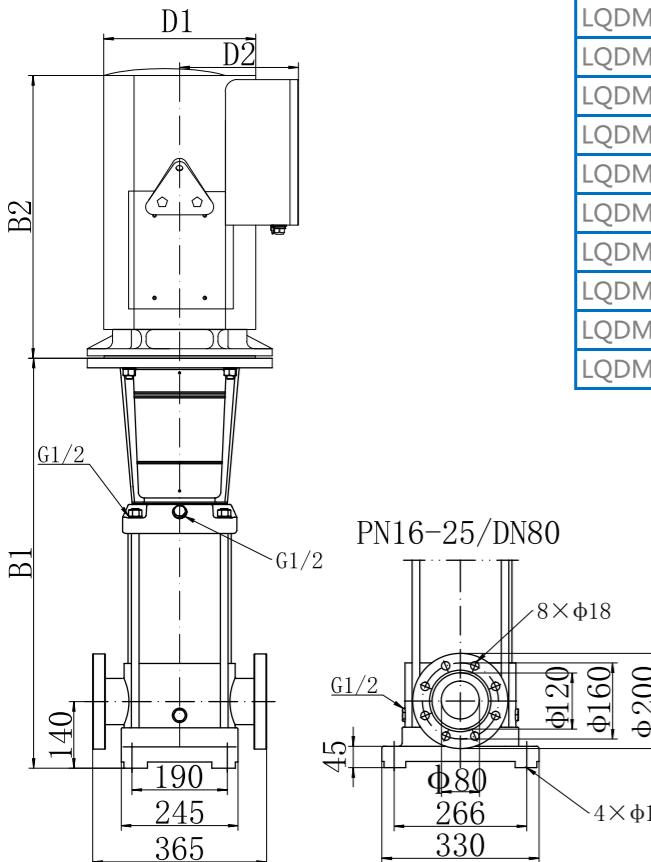

尺寸和重量 (Dimensions and weight)

型号 Model	Size (mm)					Weight (KG)
	B1	B2	B1+B2	D1	D2	
LQDM45-1-1	560	440	1000	210	192	82
LQDM45-1	560	440	1000	210	192	85
LQDM45-2-2	640	470	1110	210	192	82
LQDM45-2	640	470	1110	210	192	86
LQDM45-3-2	820	535	1355	250	259	139
LQDM45-3	820	535	1355	250	259	149
LQDM45-4-2	900	565	1465	250	259	170
LQDM45-4	900	565	1465	250	259	170
LQDM45-5-2	980	565	1545	250	259	202
LQDM45-5	980	595	1575	250	259	202

技术数据 Technical data


性能表 (Performance table)

型号 Model	功率 Power	转速 Speed	Q (m³/h)	30	40	50	60	65	70	80
	kW	r/min								
LQDM64-1-1	4	3000	H	21	20	17	15	14	12	9
LQDM64-1	5.5	3000		29	27	25	23	22	20	16
LQDM64-2-2	7.5	3000		43	39	36	32	28	25	19
LQDM64-2-1	11	3000		50	48	44	39	36	33	26
LQDM64-2	11	3000		58	56	51	47	44	40	33
LQDM64-3-2	15	3000		72	68	61	55	50	45	35
LQDM64-3-1	15	3000		80	75	69	62	58	52	43
LQDM64-3	15	3000		87	83	76	70	65	60	50
LQDM64-4-2	18.5	3000		100	95	87	78	72	65	51
LQDM64-4-1	18.5	3000		109	103	95	85	80	73	59

尺寸和重量 (Dimensions and weight)

型号 Model	Size (mm)					Weight (KG)
	B1	B2	B1+B2	D1	D2	
LQDM64-1-1	576	440	1016	210	192	100
LQDM64-1	576	470	1046	210	192	92
LQDM64-2-2	658	470	1128	210	192	101
LQDM64-2-1	758	535	1293	250	259	119
LQDM64-2	758	535	1293	250	259	119
LQDM64-3-2	840	565	1405	250	259	157
LQDM64-3-1	840	565	1405	250	259	157
LQDM64-3	840	565	1405	250	259	153
LQDM64-4-2	922	595	1517	250	259	201
LQDM64-4-1	922	595	1517	250	259	201

安装图 (Installation drawing)

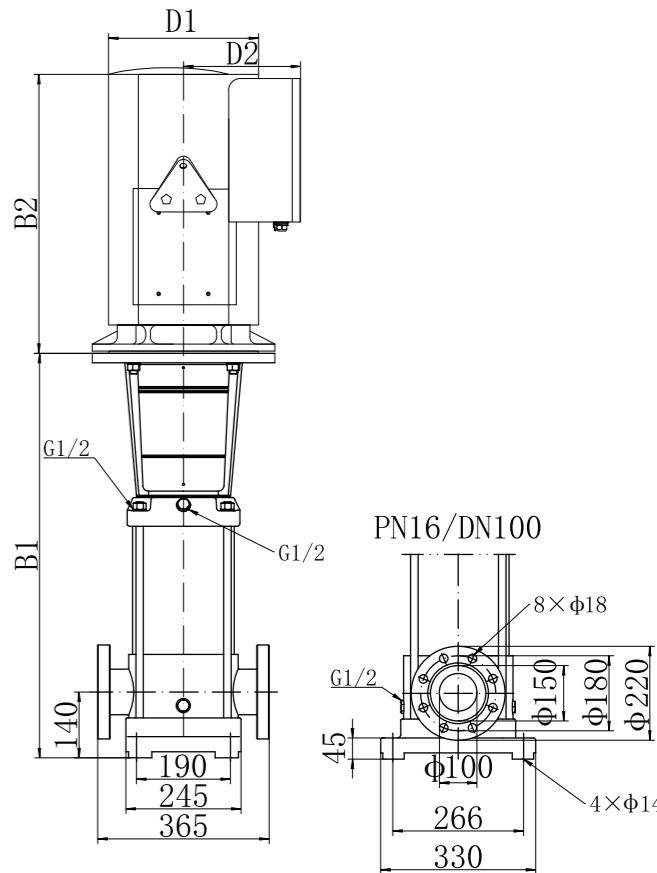



莲盛

莲盛泵业

LIANSHENGPUMP




莲盛

技术数据 Technical data

性能表 (Performance table)

型号 Model	功率 Power kW	转速 Speed r/min	Q (m³/h)	50	60	70	80	85	90	100	110
				24	21	19	17	15	14	11	7
LQDM90-1-1	5.5	3000	H	27	26	24	23	22	21	17	13
LQDM90-1	7.5	3000		45	43	39	35	33	31	24	16
LQDM90-2-2	11	3000		58	55	51	48	45	44	39	33
LQDM90-2	15	3000		74	71	65	60	57	53	45	35
LQDM90-3-2	18.5	3000									

安装图 (Installation drawing)

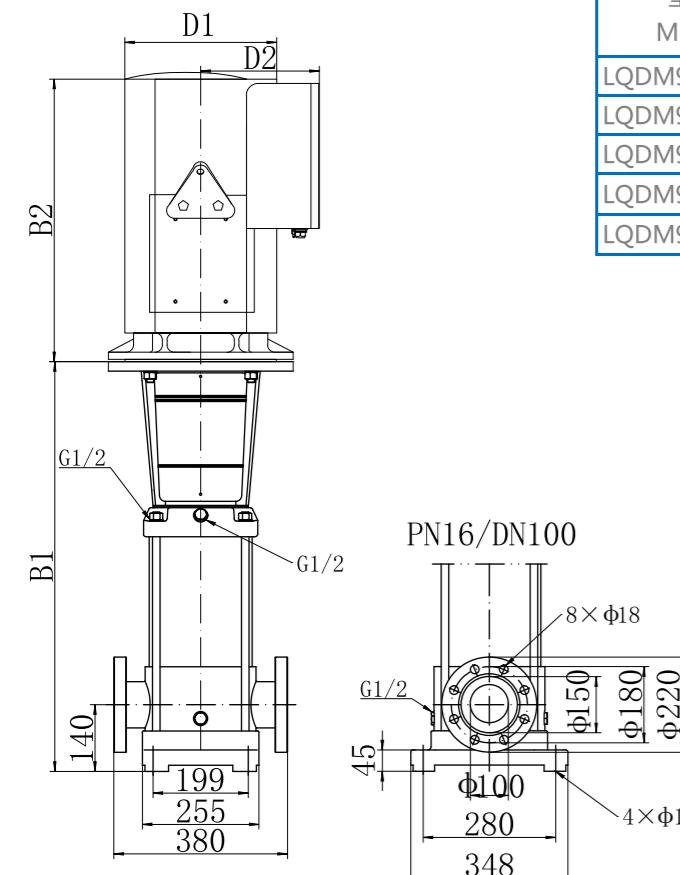

尺寸和重量 (Dimensions and weight)

型号 Model	Size (mm)					Weight (KG)
	B1	B2	B1+B2	D1	D2	
LQDM90-1-1	587	470	1057	210	192	103
LQDM90-1	587	470	1057	210	192	104
LQDM90-2-2	779	535	1314	250	259	130
LQDM90-2	779	565	1344	250	259	161
LQDM90-3-2	871	595	1466	250	259	183